

COPPER CONNECTOR

1. Low Voltage Cable Lug
2. Low Voltage Cable Link
3. Medium Voltage Cable Lug
4. Medium Voltage Cable Link
5. MCCB CABLE LUG
6. Outdoor Cable Lug(Solder Sealed)
7. Two-Hole Cable Lug
8. 90 Degree Cable Lug
9. Outdoor Long Barrel Cable Lug(Solder Sealed)
10. 'C' Type Connector
11. Copper Trunking Earth Link



LOW VOLTAGE CABLE LUG

Use for Copper Conductor.


Crimp Type for Hexagon and Indent Die.

High Conductivity Copper : 99% I.A.C.S

Copper Purity : 99.9%

Finishing : Tin Plated


Compliant to MS1540 (Malaysian Standard).

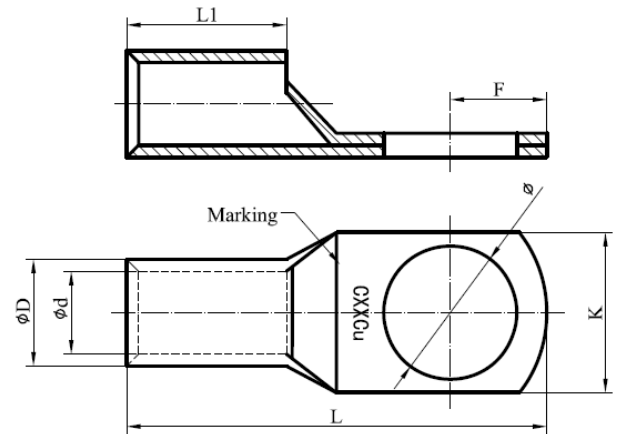

Size	Stud hole	Item code	L	L1	ØD	Ød	K	Crimping Tool	Hexagon Die A/F	No. Of Crimps
1.5mm ²	M5	CLMS-1.5-5	18	6.5	3.35	1.75	8.0	TCKK-10	Indent	1
2.5mm ²	M5	CLMS-2.5-5	19	7.0	3.90	2.3	8.0	TCKK-10	Indent	1
4mm ²	M5	CLMS-4-5	21	7.5	4.70	3.0	8.0	TCKK-10	Indent	1
6mm ²	M6	CLMS-6-6	24	8.0	5.30	3.6	9.8	TCKK-10	Indent	1
10mm ²	M6	CLMS-10-6	25	9.0	6.30	4.3	10.5	TCKK-10	Indent	1
16mm ²	M8	CLMS-16-8	32	12.0	7.80	5.6	12.5	TCCP-300	6.4	1
25mm ²	M8	CLMS-25-8	35	14.0	9.30	7.0	13.5	TCCP-300	7.7	1
35mm ²	M10	CLMS-35-10	42	15.0	10.80	8.4	16.0	TCCP-300	8.9	1
50mm ²	M10	CLMS-50-10	46	18.0	12.50	9.5	18.0	TCCP-300	10.3	1
70mm ²	M12	CLMS-70-12	51	19.0	14.40	11.2	20.7	TCCP-300	11.9	1
95mm ²	M12	CLMS-95-12	57	21.0	17.50	13.5	25.0	TCCP-300	14.5	1
120mm ²	M12	CLMS-120-12	62	28.0	19.00	14.6	26.5	TCCP-300	15.7	2
150mm ²	M16	CLMS-150-16	70	30.0	21.40	16.4	30.5	TCCP-300	17.6	2
185mm ²	M16	CLMS-185-16	78	32.0	23.70	18.5	34.0	TCCP-300/630	19.5	2/ 1
240mm ²	M16	CLMS-240-16	102	42.0	27.40	21.0	40.0	TCCP-300/630	22.6	3/ 2
300mm ²	M16	CLMS-300-16	110	44.0	30.50	23.5	45.0	TCCP-630	25.2	2
400mm ²	M16	CLMS-400-16	116	45.0	34.00	26.2	50.0	TCCP-630	28.5	2
500mm ²	M20	CLMS-500-20	135	52.0	38.60	30.0	55.0	TCCP-630	32.1	3
630mm ²	M20	CLMS-630-20	143	52.0	44.70	34.5	64.0	TCCP-630	37.0	3
800mm ²	BLANK	CLMS-800	170	66.0	50.60	39.0	71.5	TCCP-1000	41.6	3
1000mm ²	BLANK	CLMS-1000	200	86.0	56.20	43.0	79.5	TCCP-1000	46.2	3

Notes:

1. All dimensions are in mm.
2. Special long barrel, multi-hole and other dimension customizations are available on request.



CONWAY
Connecting Power

LOW VOLTAGE CABLE LINK

Use for Copper Conductor.


Crimp Type for Hexagon and Indent Die.

High Conductivity Copper : 99% I.A.C.S

Copper Purity : 99.9%

Finishing : Tin Plated


Compliant to MS1779 (Malaysian Standard).

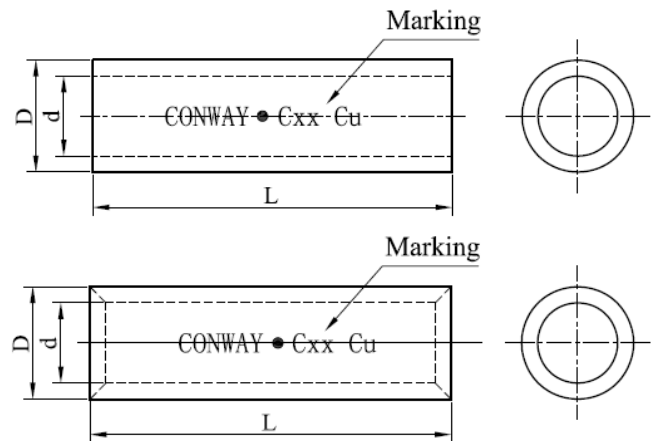

Size	Item Code	L	D	d	Crimping Tool	Hexagon Die A/F	No. Of Crimps
1.5mm ²	CFMS-1.5	18	3.35	1.75	CK-10	Indent	1
2.5mm ²	CFMS-2.5	18	3.9	2.3	CK-10	Indent	1
4mm ²	CFMS-4	19	4.7	3.0	CK-10	Indent	1
6mm ²	CFMS-6	20	5.3	3.6	CK-10	Indent	1
10mm ²	CFMS-10	23	6.3	4.3	CK-10	Indent	1
16mm ²	CFMS-16	30	7.8	5.6	CP-300	6.4	1
25mm ²	CFMS-25	34	9.3	7.0	CP-300	7.7	1
35mm ²	CFMS-35	38	10.8	8.4	CP-300	8.9	1
50mm ²	CFMS-50	40	12.5	9.5	CP-300	10.3	1
70mm ²	CFMS-70	45	14.4	11.2	CP-300	11.9	1
95mm ²	CFMS-95	50	17.5	13.5	CP-300	14.5	1
120mm ²	CFMS-120	54	19.0	14.6	CP-300	15.7	2
150mm ²	CFMS-150	65	21.4	16.4	CP-300	17.6	2
185mm ²	CFMS-185	68	23.7	18.5	CP-300/ CP-630	19.5	2/ 1
240mm ²	CFMS-240	95	27.4	21.0	CP-300/ CP-630	22.6	3/ 2
300mm ²	CFMS-300	100	30.5	23.5	CP-630	25.2	2
400mm ²	CFMS-400	115	34.0	26.2	CP-630	28.5	2
500mm ²	CFMS-500	120	38.6	30.0	CP-630	32.1	3
630mm ²	CFMS-630	130	44.7	34.5	CP-630	37.0	3
800mm ²	CFMS-800	150	50.6	39.0	CP-1000	41.6	3
1000mm ²	CFMS-1000	165	56.2	43.0	CP-1000	46.2	3

Notes:

1. All dimensions are in mm.
2. Other dimensions and customizations are available on request.



CONWAY
Connecting Power

MEDIUM VOLTAGE CABLE LUG

Use for Copper Conductor.


Crimp Type for Hexagon and Indent Die.

Corona relief taper end for application up to 33 kV.

High Conductivity Copper : 99% I.A.C.S

Copper Purity : 99.9%

Finishing : Tin Plated

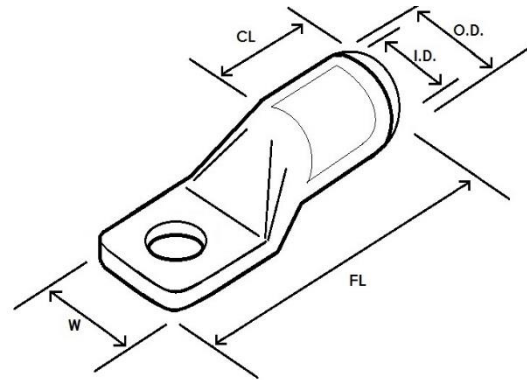


Copper tube compliant to MS1540.

Size	Stud hole	Item code	FL	CL	OD	ID	W	Crimping Tool	Hexagon Die A/F	No. Of Crimps
16mm ²	M8	CLMV-16-8	35	13	7.8	5.6	12.0	TCCP-300	6.4	1
25mm ²	M8	CLMV-25-8	48	20	9.3	7.0	13.5	TCCP-300	7.7	1
35mm ²	M10	CLMV-35-10	52	21	10.8	8.4	16	TCCP-300	8.9	1
50mm ²	M10	CLMV-50-10	55	22	12.5	9.5	18.0	TCCP-300	10.3	1
70mm ²	M12	CLMV-70-12	63	25	14.4	11.2	20.5	TCCP-300	11.9	1
95mm ²	M12	CLMV-95-12	66	25	17.5	13.5	25.0	TCCP-300	14.5	1
120mm ²	M12	CLMV-120-12	73	27	19.0	14.6	28.0	TCCP-300	15.7	2
150mm ²	M16	CLMV-150-16	78	30	21.4	16.4	31.5	TCCP-300	17.6	2
185mm ²	M16	CLMV-185-16	82	32	23.7	18.5	35.0	TCCP-300/630	19.5	2/ 1
240mm ²	M16	CLMV-240-16	115	50	27.4	21.0	40.0	TCCP-300/630	22.6	3/ 2
300mm ²	M16	CLMV-300-16	121	50	30.5	23.5	45.0	TCCP-630	25.2	2
400mm ²	M16	CLMV-400-16	139	60	34.0	26.2	50.0	TCCP-630	28.5	2
500mm ²	M20	CLMV-500-20	158	65	38.6	30.0	55.0	TCCP-630	32.1	3
630mm ²	M20	CLMV-630-20	161	65	44.7	34.5	64.0	TCCP-630	37.0	3

Notes:

1. All dimensions are in mm.
2. Other dimension customizations are available on request.



MEDIUM VOLTAGE CABLE LINK

Use for Copper Conductor.

Crimp Type for Hexagon and Indent Dies.


Corona relief taper end for application up to 36 KV.

High Conductivity Copper : 99% I.A.C.S

Copper Purity : 99.9%

Finishing : Tin Plated


Copper tube compliant to MS1779.

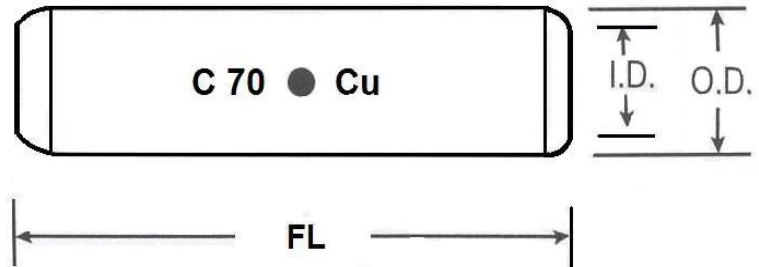

Size	Item Code	L	OD	ID	Crimping Tool	Hexagon Die A/F	No. Of Crimps
50mm ²	CFMV-50	44	12.5	9.5	TCCP-300	10.3	1
70mm ²	CFMV-70	49	14.4	11.2	TCCP-300	11.9	1
95mm ²	CFMV-95	54	17.5	13.5	TCCP-300	14.5	1
120mm ²	CFMV-120	58	19.0	14.6	TCCP-300	15.7	2
150mm ²	CFMV-150	68	21.4	16.4	TCCP-300	17.6	2
185mm ²	CFMV--185	70	23.7	18.5	TCCP-300/ CP-630	19.5	2/ 1
240mm ²	CFMV-240	100	27.4	21.0	TCCP-300/ CP-630	22.6	3/ 2
300mm ²	CFMV-300	110	30.5	23.5	TCCP-630	25.2	2
400mm ²	CFMV-400	120	34.0	26.2	TCCP-630	28.5	2
500mm ²	CFMV-500	125	38.6	30.0	TCCP-630	32.1	3
630mm ²	CFMV-630	135	44.7	34.5	TCCP-630	37.0	3
800mm ²	CFMV-800	160	50.6	39.0	TCCP-800	41.6	3
1000mm ²	CFMV-1000	170	56.2	43.0	TCCP-1000	46.2	3

Notes:

1. All dimensions are in mm.
2. Other dimensions and customizations are available on request.





CONWAY
Connecting Power

MCCB CABLE LUG

Suitable for all types of MCCB end termination.
Narrow palm to fit tight spaces.
Crimp Type for Hexagon Dies.


High Conductivity Copper : 99% I.A.C.S
Copper Purity : 99.9%
Finishing : Tin Plated

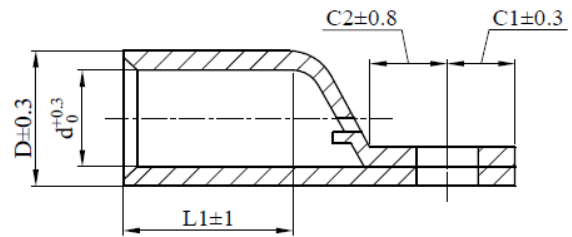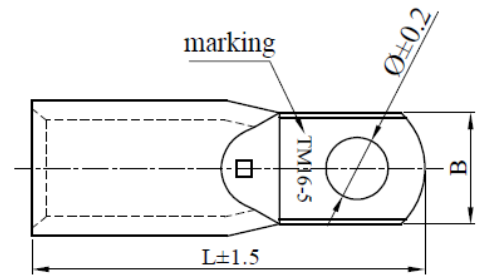

Size	Stud Hole	Item Code	D	d	B	L	L1	C1	C2	Hexagon Die A/F
10mm ²	M5	CLMC-10-5	6.3	4.3	9.0	27.0	10.0	6.0	6.0	Indent
16mm ²	M5	CLMC-16-5	7.8	5.6	9.0	31.0	12.0	6.0	6.0	6.4
25mm ²	M5	CLMC-25-5	9.3	7.0	9.0	35.0	14.0	6.0	6.0	7.7
35mm ²	M6	CLMC-35-6	10.8	8.4	11.5	40.5	16.0	7.0	8.0	8.9
50mm ²	M8	CLMC-50-8	12.5	9.5	12.8	45.5	18.0	8.0	9.0	10.3
70mm ²	M8	CLMC-70-8	14.8	11.2	15.8	50.0	19.0	9.0	9.0	11.9
95mm ²	M8	CLMC-95-8	17.9	13.5	17.8	55.0	22.0	9.0	9.0	14.4
120mm ²	M8	CLMC-120-8	20.0	15.6	19.0	68.0	28.0	9.0	14.0	16.5
150mm ²	M8	CLMC-150-8	21.8	16.7	24.0	75.0	30.0	9.0	18.0	18.0
185mm ²	M10	CLMC-185-10	24.2	19.0	24.5	79.0	32.0	9.5	18.0	20.0

Notes:

1. All dimensions are in mm.




OUTDOOR CABLE LUG (SOLDER SEALED)

Specially designed for outdoor terminations.
No peep-hole and palm is solder-sealed to stop ingress of water and oil.

Use for Copper Conductor.
Crimp Type for Hexagon and Indent Die.
Suitable for Low and Medium Voltage application.

High Conductivity Copper : 99% I.A.C.S
Copper Purity : 99.9%
Finishing : Tin Plated


Copper tube compliant to MS1540.

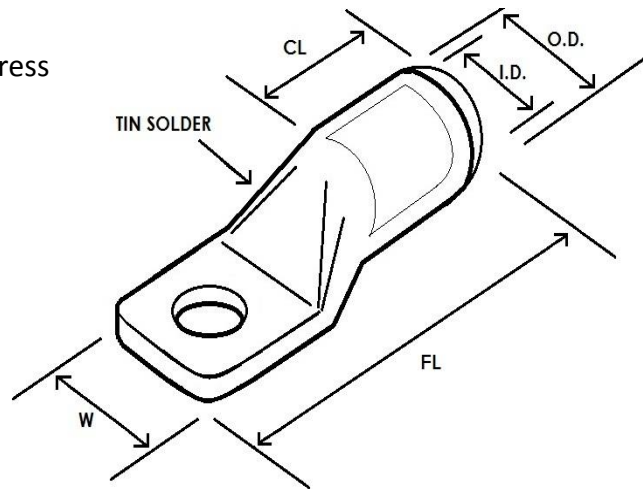

Size	Stud Hole	Item code	FL	CL	OD	ID	W	Crimping Tool	Hexag on Die A/F	No. Of Crimps
50mm ²	M10	CLOD-50-10	55	22	12.5	9.5	18.0	TCCP-300	10.3	1
70mm ²	M12	CLOD-70-12	63	25	14.4	11.2	20.5	TCCP-300	11.9	1
95mm ²	M12	CLOD-95-12	66	25	17.5	13.5	25.0	TCCP-300	14.5	1
120mm ²	M12	CLOD-120-12	73	27	19.0	14.6	28.0	TCCP-300	15.7	2
150mm ²	M16	CLOD-150-16	78	30	21.4	16.4	31.5	TCCP-300	17.6	2
185mm ²	M16	CLOD-185-16	82	32	23.7	18.5	35.0	TCCP-300/630	19.5	2/ 1
240mm ²	M16	CLOD-240-16	115	50	27.4	21.0	40.0	TCCP-300/630	22.6	3/ 2
300mm ²	M16	CLOD-300-16	121	50	30.5	23.5	45.0	TCCP-630	25.2	2
400mm ²	M16	CLOD-400-16	139	60	34.0	26.2	50.0	TCCP-630	28.5	2
500mm ²	M20	CLOD-500-20	158	65	38.6	30.0	55.0	TCCP-630	32.1	3
630mm ²	M20	CLOD-630-20	161	65	44.7	34.5	64.0	TCCP-630	37.0	3

Notes:

1. All dimensions are in mm.
2. Other dimension customizations are available on request.
3. Please consult with our Sales Person before order.



CONWAY
Connecting Power

TWO-HOLE CABLE LUG

Use for Copper Conductor.

Corona relief taper end for application up to 33 KV.


Crimp Type for Hexagon and Indent Dies.

High Conductivity Copper : 99% I.A.C.S

Copper Purity : 99.9%

Finishing : Tin Plated


Copper Tube compliant to MS1540.

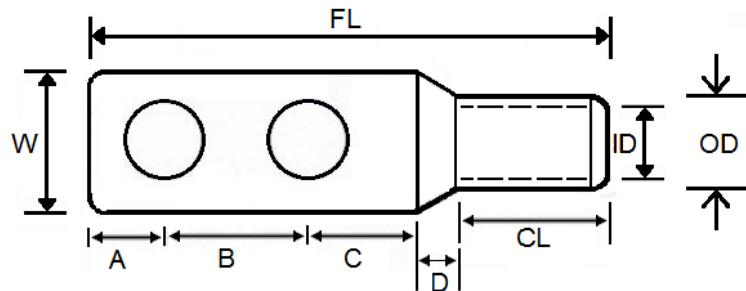

Size	Stud Hole	Item Code	A	B	C	D	W	OD	ID	FL	CL	Hexagon Die A/F
16mm ²	M8	CLTH-16-8	10	45	12	-	12.0	7.8	5.6	88	13	6.4
25mm ²	M8	CLTH-25-8	10	45	12	-	13.5	9.3	7.0	98	20	7.7
35mm ²	M10	CLTH-35-10	12	45	14	-	16.0	10.8	8.4	103	21	8.9
50mm ²	M10	CLTH-50-10	12	45	14	-	18.0	12.5	9.5	105	22	10.3
70mm ²	M12	CLTH-70-12	14	45	16	14	20.5	14.4	11.2	114	25	11.9
95mm ²	M12	CLTH-95-12	16	45	18	14	25.0	17.5	13.5	118	25	14.5
120mm ²	M12	CLTH-120-12	16	45	18	15	28.0	19.0	14.6	122	28	15.7
150mm ²	M16	CLTH-150-16	16	45	18	15	31.5	21.4	16.4	124	30	17.6
185mm ²	M16	CLTH-185-16	16	45	18	22	35.0	23.7	18.5	133	32	19.5
240mm ²	M16	CLTH-240-16	16	45	18	25	40.0	27.4	21.0	154	50	22.6
300mm ²	M16	CLTH-300-16	16	45	18	28	45.0	30.5	23.5	157	50	25.2
400mm ²	M16	CLTH-400-16	19	45	22	30	50.0	34.0	26.2	176	60	28.5
500mm ²	M20	CLTH-500-20	19	45	22	30	55.0	38.6	30.0	181	65	32.1
630mm ²	M20	CLTH-630-20	19	45	22	35	64.0	44.7	34.5	186	65	37.0

Notes:

1. All dimensions are in mm.
2. Other dimension customizations are available on request.
3. Please consult with our Sales Person before order.



CONWAY
Connecting Power


90 DEGREE CABLE LUG

Use for Copper Conductor.

Crimp Type for Hexagon and Indent Die.

High Conductivity Copper : 99% I.A.C.S
Copper Purity : 99.9%
Finishing : Tin Plated


Copper tube compliant to MS1540

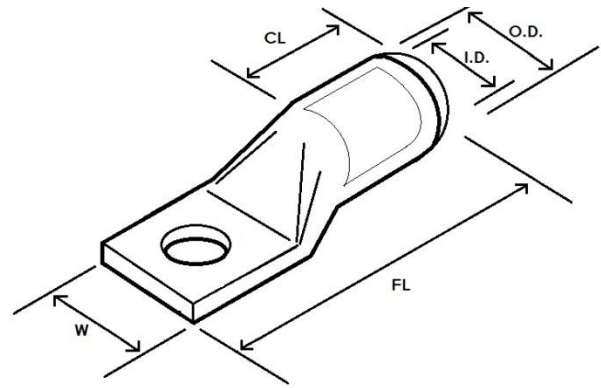

Size	Stud hole	FL	CL	OD	ID	W	Crimping Tool	Hexagon Die A/F	No. Of Crimps
16mm ²	M8	39	13	7.8	5.6	12.0	TCCP-300	6.4	1
25mm ²	M8	53	20	9.3	7.0	13.5	TCCP-300	7.7	1
35mm ²	M10	58	21	10.8	8.4	16.0	TCCP-300	8.9	1
50mm ²	M10	62	22	12.5	9.5	18.0	TCCP-300	10.3	1
70mm ²	M12	71	25	14.4	11.2	20.5	TCCP-300	11.9	1
95mm ²	M12	75	25	17.5	13.5	25.0	TCCP-300	14.5	1
120mm ²	M12	83	27	19.0	14.6	28.0	TCCP-300	15.7	2
150mm ²	M16	89	30	21.4	16.4	31.5	TCCP-300	17.6	2
185mm ²	M16	94	32	23.7	18.5	35.0	TCCP-300/630	19.5	2/ 1
240mm ²	M16	129	50	27.4	21.0	40.0	TCCP-300/630	22.6	3/ 2
300mm ²	M16	137	50	30.5	23.5	45.0	TCCP-630	25.2	2
400mm ²	M16	157	60	34.0	26.2	50.0	TCCP-630	28.5	2
500mm ²	M20	178	65	38.6	30.0	55.0	TCCP-630	32.1	3
630mm ²	M20	184	65	44.7	34.5	64.0	TCCP-630	37.0	3

Notes:

1. All dimensions are in mm.
2. Other dimension customizations are available on request.
3. Please consult with our Sales Person before order.



CONWAY
Connecting Power


OUTDOOR LONG BARREL CABLE LUG (SOLDER SEALED)

Specially designed for outdoor terminations.
No peep-hole and palm is solder-sealed to stop ingress of water and oil.

Use for Copper Conductor.
Crimp Type for Hexagon and Indent Die.
Suitable for Low and Medium Voltage application.

High Conductivity Copper : 99% I.A.C.S
Copper Purity : 99.9%
Finishing : Tin Plated


Copper tube compliant to MS1540.

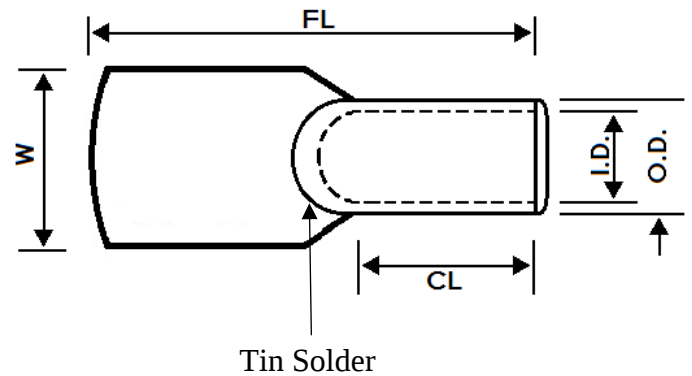

Size	Stud Hole	Item code	FL	CL	OD	ID	W	Crimping Tool	Hexag on Die A/F	No. Of Crimps
500mm ²	Blank	CLOL-500-Blank	185	90	38.6	30.0	55.0	TCCP-630	32.1	3
630mm ²	Blank	CLOL-630-Blank	190	90	44.7	34.5	64.0	TCCP-630	37.0	3

Notes:

- All dimensions are in mm.
- Other sizes and dimension customizations are available on request.




CONWAY
Connecting Power

'C' TYPE CONNECTOR

Use for Copper Conductor.
Dimpled and serrated to provide high pull-out value.
Chamfered edges design to protect the cables.

High Conductivity Copper : 99% I.A.C.S
Copper Purity : 99.9%
Finishing : Tin Plated Min 3-microns

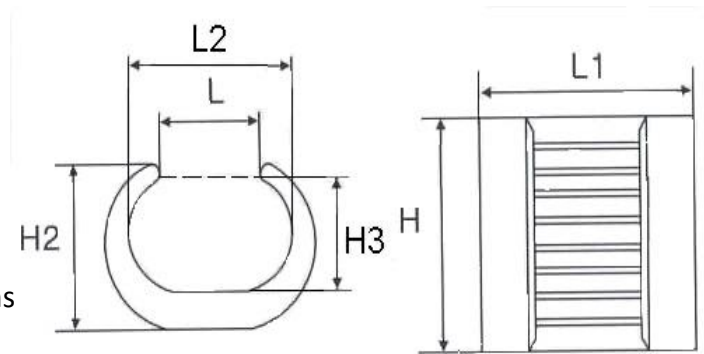

Type	Item Code	L	L1	L2	H	H2	H3	Conductor Range (mm ²)
U-T44	CCUT-44	8.3	19.0	12.4	20.0	14.0	8.1	27-44
U-T60	CCUT-60	10.8	21.4	15.3	22.5	15.0	10.0	45-60
U-T76	CCUT-76	9.5	24.0	16.7	22.5	17.0	10.7	61-76
U-T98	CCUT-98	14.5	28.0	21.2	25.0	19.0	13.4	77-98
U-T122	CCUT-122	14.0	29.3	21.3	26.0	21.0	14.5	99-122
U-T154	CCUT-154	17.0	35.0	23.8	28.0	25.0	16.8	123-154
U-T190	CCUT-190	17.0	36.5	28.2	35.0	25.0	17.2	155-190
U-T240	CCUT-240	20.0	40.0	30.2	40.0	29.0	21.3	191-240
U-T288	CCUT-288	22.0	44.0	34.2	45.0	32.0	22.9	241-288
U-T365	CCUT-365	27.5	48.0	37.6	50.0	34.0	24.2	289-365
U-T450	CCUT-450	28.0	55.0	41.9	60.0	41.0	27.6	366-450

Notes:

1. All dimensions are in mm.




CONWAY
Connecting Power

COPPER TRUNKING EARTH LINK

Copper earth links provide a convenient common earthing point for electrical installations.

Manufactured from copper strip.
Copper Purity : 99.9%

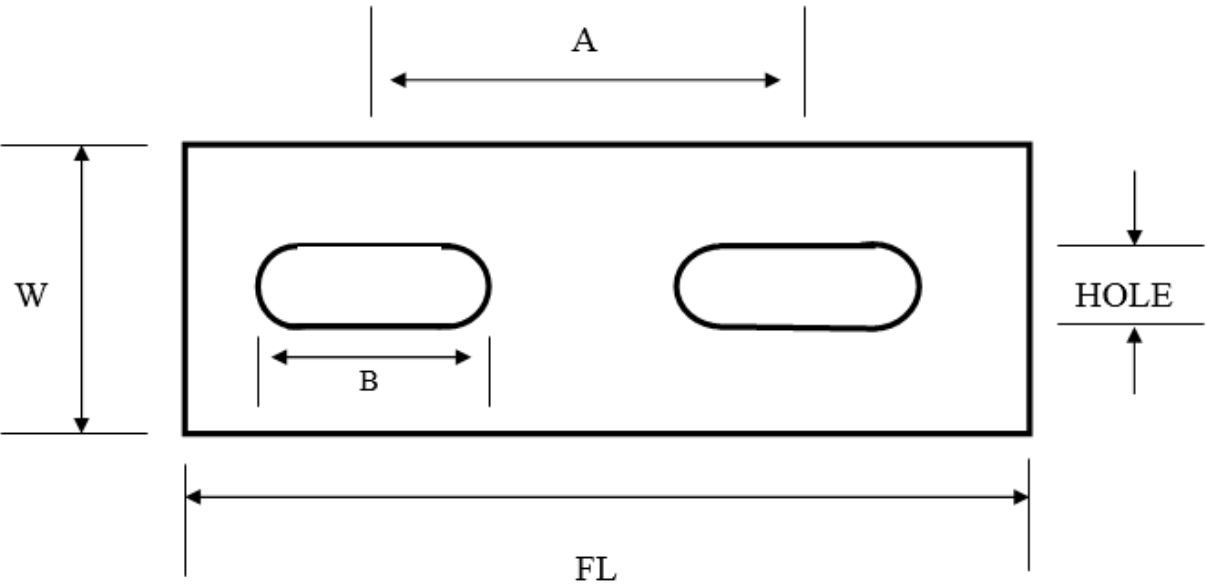

Item Code	FL	W	A	B	Hole	Thickness
CELK-19X1.0X76-M8	76.0	19.0	44.0	18.0	8.2	1.0
CELK-19X1.6X76-M6	76.0	19.0	46.0	14.5	6.2	1.6
CELK-25X3X76-M6	76.0	25.0	46.0	14.5	6.2	3.0
CELK-25X3X76-M8	76.0	25.0	44.0	18.0	8.2	3.0

- Notes:
- 1. All dimensions are in mm.
 - 2. Other dimension customizations are available on request.



BIMETAL CONNECTOR & ALUM. CONNECTOR




1. Copper / Aluminium Bi-Metal Lug
2. Copper / Aluminium Bi-Metal Link
3. Aluminium Jointing Ferrule
4. Aluminium Cable Lug
5. Mechanical Lug
6. Mechanical Connector
7. MCCB Copper Alum. Bi-Metal Lug
8. Bi-Metal Flat Pin

COPPER/ALUMINIUM BI-METAL LUG

This is a high quality Al/Cu cable lug suitable for connecting Aluminium conductors to Copper. It is made from solid Aluminium and Copper rod, friction welded. It comes pre-filled with jointing compound, plugged and individually labeled.

Copper : ETP Cu 99.9%
Aluminium : Al 99.5%

Suitable to be crimped with hexagon or indent dies.
Type tested to IEC 61238.
Product certified by TNB with SGP.

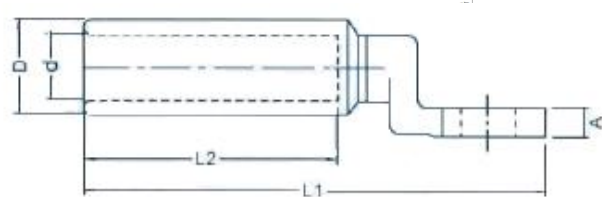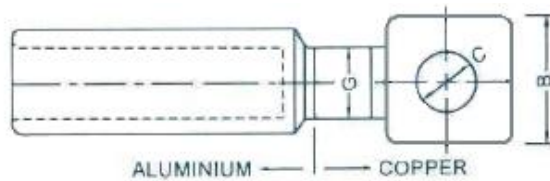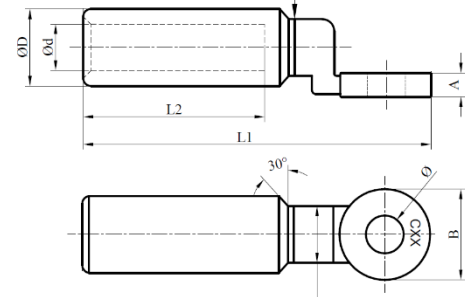

Model BLST-500, 630, 800 & 1000 comes in square palm.

Size (mm ²)	Item Code	L1	L2	D	d	G	B	A	Ø	Conway Tools & Accessories				Number of Crimp
										Head Type	Containing Die Type	Indent or Type	Hexagon Die A/F	
16	BLST-16-10	80	43	16	5.5	12.0	20	4.0	10.5	CH-240	MA25	P25	13.2	2
25	BLST-25-10	80	43	16	6.5	12.0	20	4.0	10.5	CH-240	MA25	P25	13.2	2
35	BLST-35-10	80	43	16	8.5	12.0	20	4.0	10.5	CH-240	MA25	P25	13.2	2
50	BLST-50-12	88	43	20	9.5	14.8	24	5.0	12.8	CH-240	MA95	P95	16.5	2
70	BLST-70-12	88	43	20	11.0	14.8	24	5.0	12.8	CH-240	MA95	P95	16.5	2
95	BLST-95-12	88	43	20	12.5	14.8	24	5.0	12.8	CH-240	MA95	P95	16.5	2
120	BLST-120-12	110	59	25	13.7	18.8	30	6.0	12.8	CH-240	MA150	P150	20.6	2
150	BLST-150-12	110	59	25	15.5	18.8	30	6.0	12.8	CH-240	MA150	P150	20.6	2
185	BLST-185-12	116	59	32	17.0	23.8	35	7.0	12.8	CH-240	MA240	P240	26.4	2
240	BLST-240-12	116	59	32	19.5	23.8	35	7.0	12.8	CH-240	MA240	P240	26.4	2
300	BLST-300-16	155	93	40	23.3	28.0	36	7.5	16.5	CH-630	MA300	P500	33.0	2
400	BLST-400-16	155	93	40	26.0	28.0	36	7.5	16.5	CH-630	MA300	P500	33.0	2
500	BLST-500-16	195	94	47	29.1	36.8	60x60	10.0	16.5	CH-630	MA500	P500	38.8	2
630	BLST-630-16	195	94	47	32.5	36.8	60x60	10.0	16.5	CH-630	MA500	P500	38.8	2
800	BLST-800	260	125	60	39.0	45.0	80x80	10.0	Blank	CP-1000	-	-	49.5	-
1000	BLST-1000	260	125	60	43.0	45.0	80x80	10.0	Blank	CP-1000	-	-	49.5	-

Notes:

- All dimensions are in mm and are based on French Standard HN 68-S-90 & TNB-MALAYSIA (Except for BLST-800 & BLST-1000).




CONWAY
Connecting Power

COPPER/ALUMINIUM BI-METAL LINK

Ideal for transition join between Copper and Aluminium cables of various sizes.
Made from solid Aluminium and solid Copper, friction welded.

Copper : ETP Cu 99.9%

Aluminium : Al 99.5%

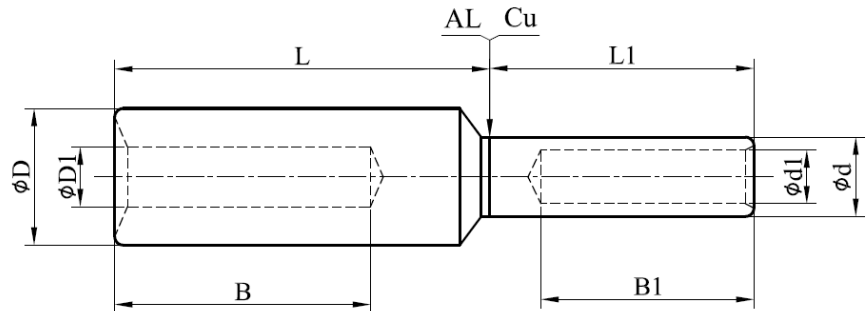

Item Code	Min & Max Application Size (mm ²)	D ±0.2	D1 ±0.2	d ±0.2	d1 ±0.2	L ±0.2	L1 ±0.2	B ±0.2	B1 ±0.2
BFST-35/35	Min: 16 Al / 16 Cu Max: 35 Al / 35 Cu	16	5.6	10.8	5.6	50	20	45	16
BFST-95/70	Min: 50 Al / 16 Cu Max: 95 Al / 70 Cu	20	9	14.4	5.6	57	28	50	22
BFST-95/95	Min: 50 Al / 16 Cu Max: 95 Al / 95 Cu	20	9	17.5	5.6	57	30	50	25
BFST-150/95B	Min: 120 Al / 16 Cu Max: 150 Al / 95 Cu	25	14	17.5	5.6	65	30	57	25
BFST-240/150	Min: 120 Al / 50 Cu Max: 240 Al / 150 Cu	32	14	22	9.5	67	37	59	31
BFST-240/240	Min: 120 Al / 50 Cu Max: 240 Al / 240 Cu	32	14	27.9	9.5	67	50	59	42
BFST-300/300	Min: 185 Al / 185 Cu Max: 300 Al / 300 Cu	40	18	31.8	19	109	55	85	45
BFST-500/500	Min: 400 Al / 300 Cu Max: 630 Al / 500 Cu	47	26.7	38.6	23.3	110	63	95	55

Notes:

1. All dimensions are in mm.
2. Other specification and customization are available upon request.
3. Please consult with our Sales Person before order.




CONWAY
Connecting Power

ALUMINIUM JOINTING FERRULE

Made from Aluminium tube for jointing same size Aluminium circular conductors.
All Ferrules are pre-filled with jointing compound, plugged and individually labeled.
Suitable for crimp type for Hexagon and Indent Die.


Aluminium Purity: AL 99.5%

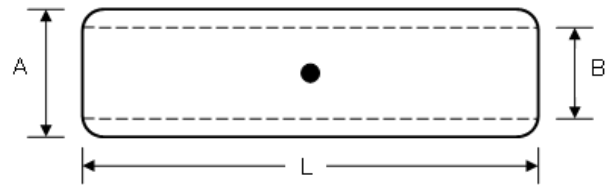

Size	Item code	Dimensions (mm)			CONWAY Tools & Accessories			
		B	A	L	Head Type	Containing Die Type	Indentor Type	Hexagon Die A/F
16	AFST-16	5.5	16	90.5	TCCH-240	LA25	P25	13.2
25	AFST-25	6.5	16	90.5	TCCH-240	LA25	P25	13.2
35	AFST-35	8.0	16	90.5	TCCH-240	LA25	P25	13.2
50	AFST-50	9.0	20	106.5	TCCH-240	LA95	P95	16.5
70	AFST-70	11.0	20	106.5	TCCH-240	LA95	P95	16.5
95	AFST-95	12.5	20	106.5	TCCH-240	LA95	P95	16.5
120	AFST-120	13.7	25	133.0	TCCH-240	LA150	P150	20.6
150	AFST-150	15.5	25	133.0	TCCH-240	LA150	P150	20.6
185	AFST-185	17.0	32	143.5	TCCH-240	LA240	P240	26.4
240	AFST-240	19.5	32	143.5	TCCH-240	LA240	P240	26.4
300	AFST-300	23.3	40	218.0	TCCH-630	LA300	P500	33.0
400	AFST-400	26.0	40	218.0	TCCH-630	LA300	P500	33.0
500	AFST-500	29.1	47	218.5	TCCH-630	LA500	P500	38.8
630	AFST-630	32.5	47	218.5	TCCH-630	LA500	P500	38.8
800	AFST-800	39.0	60	300.0	TCCP-1000	-	-	49.5
1000	AFST-1000	43.0	60	300.0	TCCP-1000	-	-	49.5

Notes:

1. All dimensions are in mm.
2. All dimensions are based on TNB Malaysia's requirements and approval.
(Product Certification Acceptance obtained from TNB Research)
3. Other dimension customizations are available on request.




CONWAY
Connecting Power

ALUMINIUM CABLE LUG

Made from Aluminium tube for terminating Aluminium circular conductors.
All lugs are pre-filled with jointing compound, plugged and individually labeled.
Suitable for crimp type for Hexagon and Indent Die.


Aluminium Purity: AL 99.5%

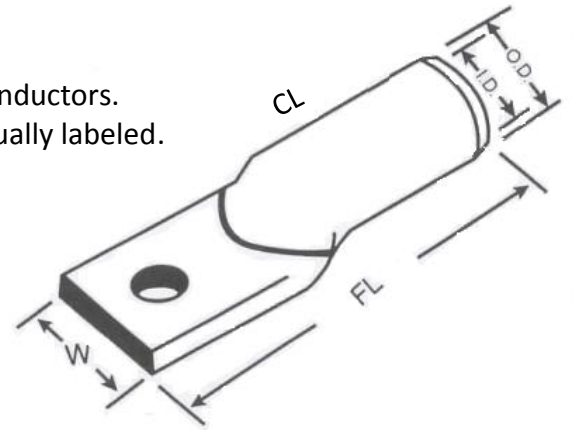

Size	Item code	Dimensions (mm)						CONWAY Tools & Accessories	
		ID	OD	FL	W	CL	Stud Hole	Head Type	Hexagon Die A/F
16	ALST-16-10	5.5	16	78	21	44	10.5	TCCP-400-AL	13.2
25	ALST-25-10	6.5	16	78	21	44	10.5	TCCP-400-AL	13.2
35	ALST-35-10	8.0	16	78	21	44	10.5	TCCP-400-AL	16.5
50	ALST-50-12	9.0	20	92	26	50	12.8	TCCP-400-AL	16.5
70	ALST-70-12	11.0	20	92	26	50	12.8	TCCP-400-AL	16.5
95	ALST-95-12	12.5	20	92	26	50	12.8	TCCP-400-AL	20.6
120	ALST-120-12	13.7	25	116	33	55	12.8	TCCP-400-AL	20.6
150	ALST-150-12	15.5	25	116	33	55	12.8	TCCP-400-AL	26.4
185	ALST-185-12	17.0	32	121	42	60	12.8	TCCP-400-AL	26.4
240	ALST-240-12	19.5	32	121	42	60	12.8	TCCP-400-AL	26.4
300	ALST-300-16	23.3	40	160	54	80	16.5	TCCP-1000-AL	33.0
400	ALST-400-16	26.0	40	160	54	80	16.5	TCCP-1000-AL	33.0
500	ALST-500-16	29.1	47	180	63	85	16.5	TCCP-1000-AL	38.8
630	ALST-630-16	32.5	47	180	65	85	16.5	TCCP-1000-AL	38.8

Notes:

1. All dimensions are in mm.
2. Other dimension customizations are available on request.



CONWAY
Connecting Power

MECHANICAL LUG

A bolted alternative which does not require crimping tool or high operator skill.

Bolts are torque-controlled to ensure clean and right shear-offs for a good contact.


Made from high strength Aluminium alloy. **Surface is electro tin-plated.**

It is suitable for use on termination of Aluminium or Copper cables.

Solid palm eliminates ingress of moisture.


All lugs are pre-filled with jointing compound and individually labeled.

Suitable for a wide range of LV and MV applications.

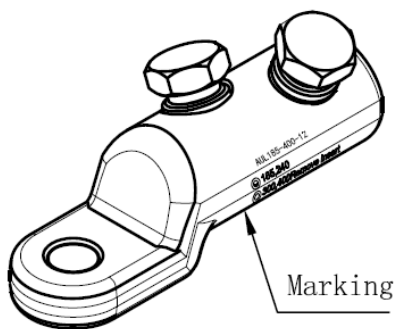

Component List

- 1 – Connector Body (Aluminium alloy)
- 2 – Bolt (Aluminium alloy)
- 3 – Insert (Aluminium alloy)
- 4 – Contact Grease

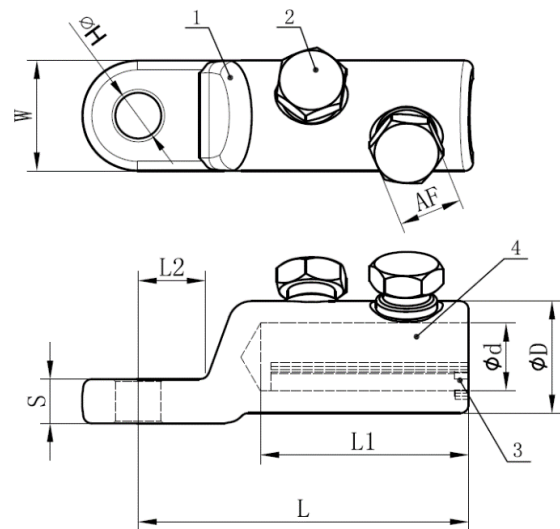

Conductor Size Range (mm)	Item code	Dimensions (mm)									No. of Bolt
		L	D	d	L1	W	S	L2	H	AF	
25-95	ALME-AUL25-95-12/1L	64.6	24	13.3	32.5	24	9	18	13	13	1
35-150	ALME-AUL35-150-12/2L	85	28	16	51	28	10	18	13	17	2
70-240	ALME-AUL70-240-12/2L	97.7	33	20	61.5	33	13	18	13	19	2
*120-300	ALME-AUL120-300-12/2L	106.7	38	24	67.5	38	14	18	13	22	2
120-300	ALME-AUL120-300-16/2L	106.7	38	24	67.5	38	14	18	17	22	2
*185-400	ALME-AUL185-400-12/3L	120	42	26	78	42	16	19	13	22	3
185-400	ALME-AUL185-400-16/3L	120	42	26	78	42	16	19	17	22	3
*300-630	ALME-AUL300-630-12/3L	140	52	33	90	51.5	20	24.5	13	24	3
300-630	ALME-AUL300-630-16/3L	140	52	33	90	51.5	20	24.5	17	24	3

*No Restock when finish



CONWAY
Connecting Power

MECHANICAL CONNECTOR

A bolted alternative which does not require crimping tool or high operator skill.



Bolts are torque-controlled to ensure clean and right shear-offs for a good contact.

Made from high strength Aluminium alloy. **Surface is electro tin-plated.**

It is suitable for jointing of Aluminium or Copper cables.

All Ferrules are pre-filled with jointing compound and individually labeled.

Suitable for a wide range of LV and MV applications.

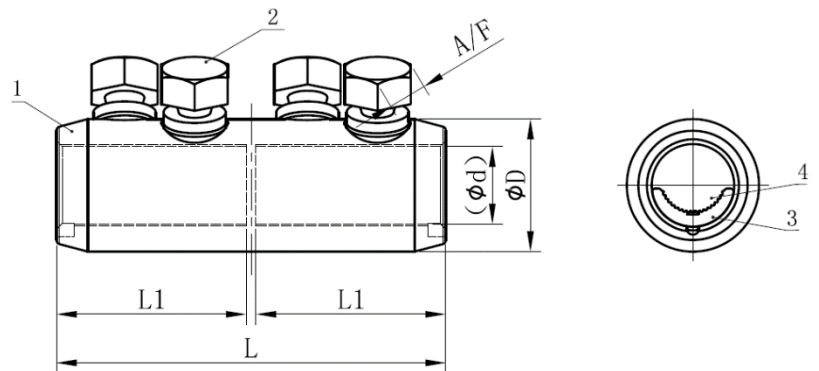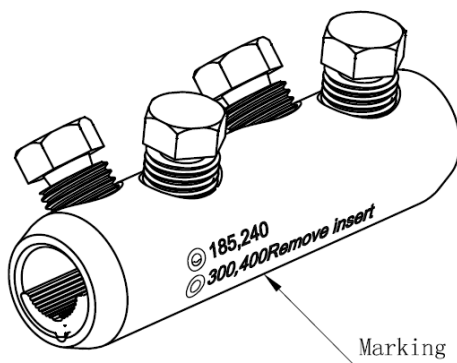

Component List

- 1 – Connector Body (Aluminium alloy)
- 2 – Bolt (Aluminium alloy)
- 3 – Insert (Aluminium alloy)
- 4 – Contact Grease

Conductor Size Range (mm)	Item code	Dimensions (mm)					Number of Bolts
		L	L1	D	d	A/F	
25-95	AFME-GLL25-95/2L	70	33.5	24	13.3	13	2
35-150	AFME-GLL35-150/4L	106	51.5	28	16	17	4
70-240	AFME-GLL70-240/4L	125	61	33	20	19	4
120-300	AFME-GLL120-300/4L	140	68	38	24	22	4
185-400	AFME-GLL185-400/6L	170	83	42	26	22	6
300-630	AFME-GLL300-630/6L	200	97	52	33	24	6

MCCB COPPER ALUMINIUM BI-METAL LUG


Specially designed for termination of Aluminium conductor into Moulded Case Circuit Breakers.

Made from solid Aluminium and solid Copper, friction welded.

Pre-filled with jointing compound, plugged and individually labeled.

Copper : E. Cu 99.9%

Aluminium: AL 99.5%

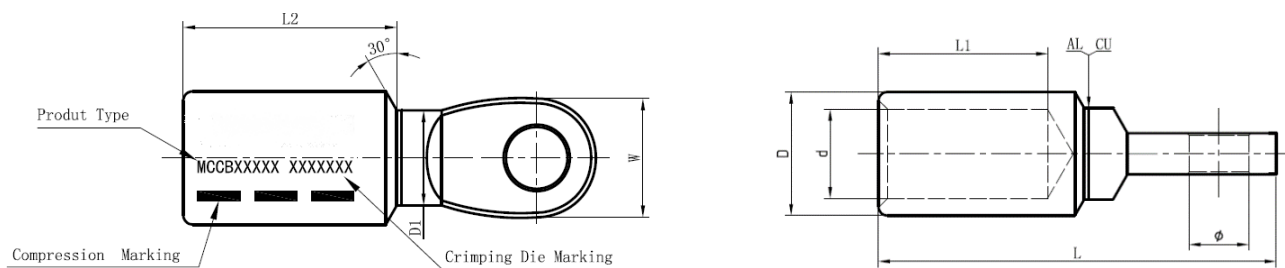

Size	Stud Hole	Item Code	L	L2	L1	D	d	W	Crimping Tools	Number of Crimp
10mm ²	8.4	BLMC-10	48.5	21.0	15.0	12.5	4.5	14.4	TCCP-300-CU50	1
16mm ²	8.4	BLMC-16	48.5	21.0	15.0	12.5	5.5	14.4	TCCP-300-CU50	1
25mm ²	8.4	BLMC-25	61.5	34.0	28.0	12.5	7.0	14.4	TCCP-300-CU50	2
35mm ²	8.4	BLMC-35	61.5	34.0	28.0	12.5	8.5	14.4	TCCP-300-CU50	2
50mm ²	8.4	BLMC-50	64.5	37.0	30.0	17.5	9.5	16.7	TCCP-300-CU95	2
70mm ²	8.4	BLMC-70	64.5	37.0	30.0	17.5	11.0	16.7	TCCP-300-CU95	2
95mm ²	8.4	BLMC-95	67.5	40.0	32.0	19.0	12.5	19.5	TCCP-300-CU120	3
120mm ²	8.4	BLMC-120	67.5	40.0	32.0	19.0	13.7	19.5	TCCP-300-CU120	3

Notes:


1. All dimensions are in mm.
2. Suitable for both Hexagon Die and Indent Die.
3. Other specification and customization are available upon request.

BI-METAL FLAT PIN

Use for transition connection of Aluminium Cable into Copper end of MCB (Low Voltage).
Made from Aluminium and Copper, friction welded and prefilled with jointing compound.

Copper : ETP Cu 99.9%

Aluminium : Al 99.5%

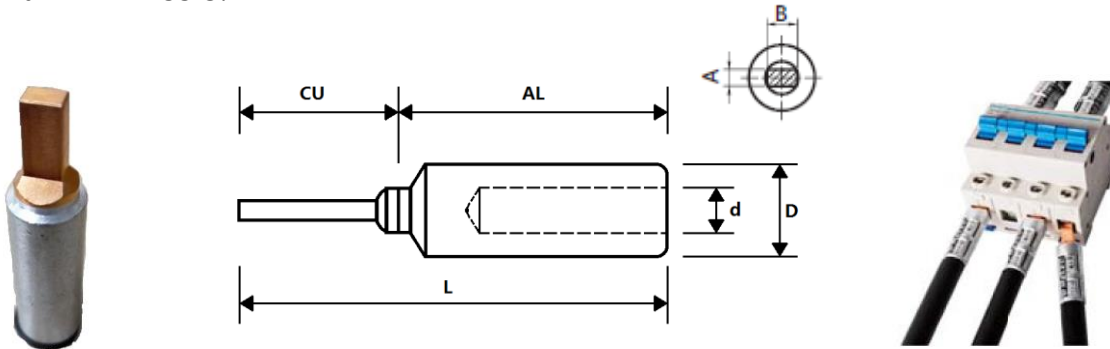

Item Code	L	A	B	D	d
BPFL-16	49	3	5.5	12.5	5.5
BPFL-25	49	3	5.5	12.5	7.0
BPFL-35	49	3	5.5	12.5	8.0

Notes:

1. All dimensions are in mm.

CONWAY TOOLS

1. Conway Crimping Tool
2. Conway Hydraulic Crimping Tool (AL)
3. Conway Hydraulic Indent Tool
4. Conway Cable Cutter
5. Conway Cutting and Bending Tool
6. Conway Hole Cutter
7. Conway Pump
8. Cable Preparation Set
9. Hydraulic & Ratchet Cable Cutter



CONWAY CRIMPING TOOL

TCKK-10

A manual indent tool for crimping of cable connectors up to 10mm².

Crimping Type	: Indent
Crimping Range	: 1.5mm ² to 10mm ²
Full Length	: 270mm
Weight	: 430g



TCCP-120

A Hydraulic crimping tool for non-insulated Copper cable lugs and links up to 120mm².

Crimping Type	: Hexagon
Crimping Range	: 16mm ² to 120mm ²
Crimping Force	: 60kN
Full Length	: 420mm
Weight	: 3.0kg

Kit Includes	: Crimping Tool
	: Dies (16, 25, 35, 50, 70, 95 & 120mm ²)
	: Double-moulded Carrying Case

Spare dies and special dies are available on request.




TCCP-300

A Hydraulic crimping tool for non-insulated Copper cable lugs and links up to 300mm².

Crimping Type	: Hexagon
Crimping Range	: 16mm ² to 300mm ²
Crimping Stroke	: 16mm
Crimping Force	: 80kN
Full Length	: 500mm
Weight	: 4.6kg

Kit Includes	: Crimping Tool
	: Dies (16, 25, 35, 50, 70, 90, 120, 150, 185, 240, 300 mm ²)
	: Double-moulded Carrying Case

Spare dies and special dies are available on request.



All tools are suitable for Malaysian Standards Cable Lug (MS 1540) & Link (MS 1779).
Hexagon Dies 25mm² to 1000mm² are also available for Aluminium conductor.

Spare parts and after-sales servicing is available.



CONWAY
Connecting Power

CONWAY CRIMPING TOOL

TCCP-400

A hydraulic operated crimping tool set that develops 13 tonnes crimp force, for up to 400mm² Copper connectors.

Crimping Type : Hexagon
 Crimping Range : 50mm² to 400mm²
 Crimping Stroke : 25mm
 Crimping Force : 130kN
 Weight : 4.0kg (Crimping Head)

Set Includes : Crimping Tool
 Dies (50, 70, 95, 120, 150, 185, 240, 300 & 400mm²)
 Steel Carrying Case
 Hand Pump



TCCP-630

A hydraulic operated crimping tool set that develops 23 tonnes crimp force, for up to 630mm² Copper connectors.

Crimping Type : Hexagon
 Crimping Range : 185mm² to 630mm²
 Crimping Stroke : 38mm
 Crimping Force : 230kN
 Weight : 6.0kg (Crimping Head)

Set Includes : Crimping Tool
 Dies (185, 240, 300, 400, 500 & 630mm²)
 Steel Carrying Case
 Hand Pump (Foot Pump is also available)



TCCP-1000 & TCPM-1000

A hydraulic operated crimping head that develops 30 tonnes crimp force, for up to 1000mm² Copper connectors.


Crimping Type : Hexagon
 Crimping Range : 500mm² to 1000mm²
 Crimping Stroke : 30mm
 Crimping Force : 300kN
 Weight : 13.5kg (Crimping Head)

Kit Includes : Crimping Tool
 Dies (500, 630, 800 & 1000mm²)
 Steel Carrying Case

Electric Pump is sold separately.



TCPM-1000
Electric Pump



All tools are suitable for Malaysian Standards Cable Lug (MS 1540) & Link (MS 1779).
 Hexagon Dies 25mm² to 1000mm² are also available for Aluminium conductor.

Spare parts and after sales servicing is available.



CONWAY
Connecting Power

CONWAY HYDRAULIC CRIMPING TOOL

For Aluminium Connectors

TCCP-400HAL & TCCP-400HP

A hydraulic operated crimping tool set that develops 13 tonnes crimp force, for up to 240mm² Aluminium connectors.

Crimping Type : Hexagon
 Crimping Range : 16mm² to 240mm²
 Crimping Stroke : 25mm
 Crimping Force : 130kN
 Weight : 4.0kg (Crimping Head)

Set Includes : Crimping Tool
 Four Dies-set (For Aluminium Connectors):
 16/25/35mm²
 50/70/95mm²
 120/150mm²
 185/240mm²

Steel Carrying Case
 Hand Pump



TCCP-1000 & TCPM-1000

A hydraulic operated crimping head that develops 30 tonnes crimp force, for up to 1000mm² Aluminium connectors.

Crimping Type : Hexagon
 Crimping Range : 300mm² to 1000mm²
 Crimping Stroke : 30mm
 Crimping Force : 300kN
 Weight : 13.5kg (Crimping Head)


Kit Includes : Crimping Tool
 Three Dies-set (For Aluminium Connectors):
 300/400mm²
 500/630mm²
 800/1000mm²

Steel Carrying Case

Electric Pump is sold separately.



TCPM-1000
Electric Pump



After-sales service support and spare parts are available.



CONWAY
Connecting Power

CONWAY HYDRAULIC INDENT TOOL

TCCH-240

Deep indent volume-control dies for Aluminium Ferrules, Bi-metal Lugs and Rounding Dies. Compliant to TNB Specification. The tools is suitable for Conway Brand & TNB Approve Bimetal Lug and Aluminium Ferrule.

Crimping Type : Deep Indent (Controlled Volume)
 Crimping Range : 25mm² to 240mm² (Aluminium Conductor)
 Crimping Force : 120kN
 Weight : 4.3kg (Without the dies)
 Rated Operating Pressure : 700kg/cm³ (10,000 P.S.I)



Components :



Die Adaptor
(DA150, DA240)



Punch
(P25, P95, P150, P240)



Bimetal Lug Containing Die
(MA25, MA95, MA150, MA 240)

Optional Components :



Optional:
Rounding Dies
(R25, R70, R120, R185)



Optional:
Punch Adaptor
(PA240)



Optional:
Aluminium Ferrule Containing Die
(LA25, LA95, LA150, LA240)



Crimping Head

TCCH-630

Deep indent volume-control dies for Aluminium Ferrules, Bi-metal Lugs and Rounding Dies. Compliant to TNB Specification. The tools is suitable for Conway Brand & TNB Approve Bimetal Lug and Aluminium Ferrule.

Crimping Type : Deep Indent (Controlled Volume)
 Crimping Range : 300mm² to 630mm² (Aluminium Conductor)
 Crimping Force : 200kN
 Weight : 6.0kg (Without the dies)
 Rated Operating Pressure : 700kg/cm³ (10,000 P.S.I)

Components :




Die Adaptor
(DA300/500)



Bimetal Lug Containing Die
(MA300, MA500)



Optional Components :



Optional:
Pre-Rounding Die Set
(R300 Aluminium Conductor)



Optional:
Aluminium Ferrule Containing Die
(LA300, LA500)

Pair the above tools with CONWAY range of Electric and Hydraulic Pumps:

TCPM-1000
 TCCP-630HP
 TCCP-630FP

After-sales service support and spare parts are available.



CONWAY
 Connecting Power

CONWAY CABLE CUTTER

TCXS-630 Hydraulic Cable Cutter

Applications : Cutting of Copper & Aluminium PVC Cable

Input Pressure : Max 700bar or 10,000psi

Opening Jaw : 45mm

Cutting Range : Up to 45mm OD

Total Length : 300mm

Weight : 5kg

Note : **DO NOT** use it to cut any rebar, steel wire or armoured cables.




Pair the above cutters with CONWAY range of Electric and Hydraulic Pumps:

TCPM-1000

TCCP-630HP

TCCP-630FP



After-sales service support and spare parts are available.



CONWAY
Connecting Power

CONWAY CUTTING AND BENDING TOOL

TCBC-150 Hydraulic Bar Cutter

Input Pressure : Max 700bar or 10,000psi
 Max. Width : 150mm
 Max. Thickness : 10mm for Copper Bar
 6mm for Mild Steel Plate
 Weight : 26kg

Also available : TCBC-200 with max cutting width of 200mm



TCBB-150 Hydraulic Bar Bender

Input Pressure : Max 700bar or 10,000psi
 Max. Width : 150mm
 Max. Thickness : 10mm for Copper Bar
 Weight : 23kg

Also available : TCBB-200 with max bending width of 200mm



TCCH-60 Hydraulic Hole Puncher

Input Pressure : Max 700bar or 10,000psi
 Output Force : 20 ton
 Max. Thickness : 10mm for Copper Bar
 6mm for Mild Steel Plate
 Dies Size : 10.5mm, 13.5mm, 17.5mm and 20.5mm
 Weight : 16kg

70mm horizontal insert spacing



TOPT-PP-70 Hydraulic Hole Puncher

Output Force : 30 ton
 Max. Thickness : 10mm for metal plate
 Punch Dies Size : 10.5mm, 13.5mm, 17.5mm and 20.5mm
 Weight : 13kg

Brand : OPT


70mm throat depth



Pair the above tools with CONWAY range of Electric and Hydraulic Pumps:

TCPM-1000
 TCCP-630HP
 TCCP-630FP

After-sales service support and spare parts are available.



CONWAY
 Connecting Power

CONWAY HOLE CUTTER

TCHC-52 Hydraulic Hole Cutter

The Hydraulic Hole Cutter comes with various dies set (16.5, 20.5, 22.5, 25.4, 30.5, 40.5 and 50.5mm). Additional dies can be fabricated according to requirements.

Input pressure	: Max. 700bar or 10,000psi
Output Force	: 8 ton
Maximum Thickness	: 2.5mm for Mild Steel Plate
Hole Size	: 16.8mm, 20mm, 22mm, 25mm, 30mm, 40mm and 52mm
Weight	: 4.0kg (Hole Cutter with a standard die)



TCHC-115 Hydraulic Hole Cutter


The Hydraulic Hole Cutter comes with ½" to 4" Dies. Additional dies can be fabricated according to requirements.

Input pressure	: Max. 700bar or 10,000psi
Output Force	: 12 ton
Maximum Thickness	: 2.5mm for Mild Steel Plate
Hole Size	: 21.8mm, 27.6mm, 34.1mm, 42.7mm, 48.7mm, 60.5mm, 76.1mm, 88.9mm, 102.8mm and 115.5mm



Attachment for different Hole Sizes:

- For dies 21.8mm & 27.6mm, insert the 3/8" Draw provided.
- For dies 34.1, 42.7, 48.7mm, use the 3/4" Draw together with "Space Ring".
- For dies 60.5, 76.1, 88.9, 102.8 and 115.5mm, just use the 3/4" Draw.



All tools come with after-sale support (servicing & and spare-parts).



CONWAY
Connecting Power

CONWAY Pump

TCCP-630HP Hydraulic Hand Pump

TCCP-630FP Hydraulic Foot Pump

Can be used in most Conway Hydraulic Head.

Max. Pressure : 700Bar or 10,000psi

Weight (Hand Pump) : 8.5kg

Weight (Foot Pump) : 10.4kg

Length : 700mm

Comes with steel carrying case.



TCCP-630HP



TCCP-630FP

TCCP-400HP Hydraulic Hand Pump

Can use to small Hydraulic Head (TCCP-400, TCHC-52, TCHC-115)

Max. Pressure : 700Bar or 10,000psi

Weight : 6kg

Length : 530mm

Comes with carton box casing.



Remark: All Conway pump is come with 1.8m Hose and Female Coupler (3/8" NPT Threads).



All tools come with after-sale support (servicing & and spare-parts).



CONWAY
Connecting Power

CONWAY Pump

TCPM-1000 Electric Pump

Single Acting Electric Pump. Have manual pressure release system if without electric power.
Can be used in most Conway Hydraulic Head.

Max. Pressure : 700Bar or 10,000psi
Reservoir Capacity : 2.6 Liter
Oil Speed : 500c.c./min at Max Pressure 700kgF/cm²
2750c.c./min at Min Pressure 20kgF/cm²
Weight : 21kg
Length : 190mm
Width : 160mm
Height : 400mm




Comes with Solenoid Valve, Power Cord Plug, Wired Remote Control and 1.8m Hydraulic Hose.

TCPM-3001 Electric Pump

Double Acting Electric Pump. Have manual pressure release system if without electric power.
Can be used in All Conway Hydraulic Head.

Max. Pressure : 700Bar or 10,000psi
Reservoir Capacity : 3.3 Liter
Oil Speed : 500c.c./min at Max Pressure 700kgF/cm²
2750c.c./min at Min Pressure 20kgF/cm²
Weight : 27kg
Length : 350mm
Width : 190mm
Height : 460mm

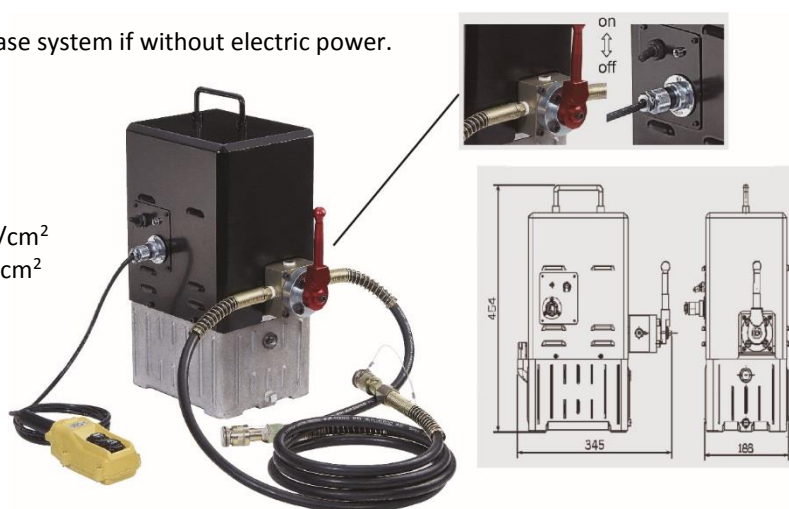

Comes with Solenoid Valve, Power Cord Plug, Wired Remote Control, VH-700 Control Valve and 1.8m Hydraulic Hose*2pcs.



All tools come with after-sale support (servicing & and spare-parts).



CONWAY
Connecting Power

CABLE PREPARATION SET

TBET-FL-135 Cable Preparation Set

Applications : 10-35KV Portable Cable Preparation Set is used for preparing most power cable for splicing or terminating.

Components :

1. Jacket Stripper Cable diameter: ≥ 25 mm, cutting thickness: 5mm
2. Strippable Semi-Con Stripper Cable diameter: 16-41 mm
3. Strippable Semi-Con Flat Nose Pliers
4. Non-Strippable Semi-Con Stripper Cable diameter: ≤ 220 mm, cutting depth: 0-1.5mm
5. Main Insulation Layer Stripper Cable diameter: ≤ 220 mm
6. Insulation Chamfer Tool Rotation size: max. 200mm
7. Hook Type Electric Knife Material: 420 steel, length: 195mm Blade length: 60mm
8. High Class Anti-Cutting Gloves
9. Portable toolbox



TBET- FL-210 Cable Preparation Set

Applications : 10KV Economical Portable Cable Preparation Set is used for preparing most power cable for splicing or terminating.

Components :

1. Semi-Con Stripper
2. Main Insulation Layer Stripper
3. Auxiliary wrench, one piece
4. Roller accessories, six pieces
5. Spare blade, two pieces
6. Portable tool bag



TBET- FL-235 Cable Preparation Set

Applications : 35KV Economical Portable Cable Preparation Set is used for preparing most power cable for splicing or terminating.

Components :

1. Semi-Con Stripper, Cable Dia: 35-65mm; Stripping range: 0-3mm
2. Main Insulation Layer Stripper: Cable Dia: 35-65mm; Stripping range: 0-3mm
3. Spare blade, two pieces
4. Portable tool bag



CONWAY
Connecting Power

HYDRAULIC CABLE CUTTER TOOL & RATCHET CABLE CUTTER

TBET- HC-50 Hydraulic Cable Cutter Tool

Applications	: Cutting of Copper & Aluminium PVC Cable
Output Force	: 6 Tons
Input Pressure	: Max 700bar or 10,000psi
Cutting Range	: Up to 50mm OD
Weight	: 3.9 kg
Remark	: Pack with plastic casing
Note	: DO NOT use it to cut any rebar, steel wire or armoured cables.



TBET- C-40 Ratchet Cable Cutter

Applications	: Cutting of Copper & Aluminium Armoured Cable
Cutting Capacity	: 300MM ² armoured Cu/Al Cable
Weight	: 1.2 kg



TBET- C-52 Ratchet Cable Cutter

Applications	: Cutting of Copper & Aluminium Armoured Cable
Cutting Capacity	: 500MM ² armoured Cu/Al Cable
Weight	: 3.1 kg

